TEXWRAP®

MEMBER PMMI

"Speed, Flexibility, Dependable Performance"

MODEL T1322/2
MODEL T1432/2

DOUBLE CHAMBER TUNNELS



- EASY TO OPERATE
- VERSATILE FOR ALMOST ANY APPLICATION
- SIMPLE TO MAINTAIN

TEXWRAP Packaging Systems
525 Vossbrink Drive · Washington, MO 63090
Ph (636) 239-1188 · Fax (636) 239-7322
sales@texwrap.com · www.texwrap.com


TEXWRAP

Double Chamber Tunnels


FEATURES:

· Continuous duty industrial grade blower motor
· Air velocity control
· Top/bottom adjustable air control dampers for controlled shrink results
· Temperature controllers with:
  · Selectable on/off and P.I.D. control with auto tuning of proportional band
  · Tamper proof setting, faulty sensor compensation and controller diagnostics
  · Easy to read L.E.D display
· Well insulated energy efficient design
· Variable speed control for conveyor motor
· Top air velocity control for the adjustment of air flow to the top or bottom of the package for an even shrink
· Audible high heat alarm
· Safety high heat limit thermostat
· Stainless steel mesh belt
· Durable powder coated finish

MODEL	T-1322/2	T-1432/2
OPENING	13"H x 22"W	14"H x 32"W
ELECTRICAL	240 V / 3 phase / 60 amps	480 V / 3 phase / 58 amps
HEATERS	6 flange cal-rod types	6 flange cal-rod types
CONVEYOR HEIGHT	adj. 30" - 35" H	adj. 30" - 35" H
CONVEYOR SPEED	0 - 160 FPM	0 - 160 FPM
SHIPPING WEIGHT	1,820 lbs.	2,000 lbs.
CONVEYOR WIDTH	15"	24"

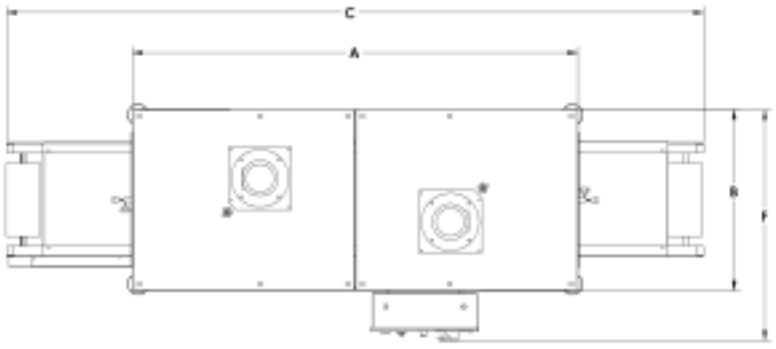

	T-1322/2	T-1432/2
A=	85"	111"
B=	34.6"	42.25"
C=	132.8"	158.8"
D=	78.8"	79.8"
E=	30.01"	30.4"
F=	44"	54.5"

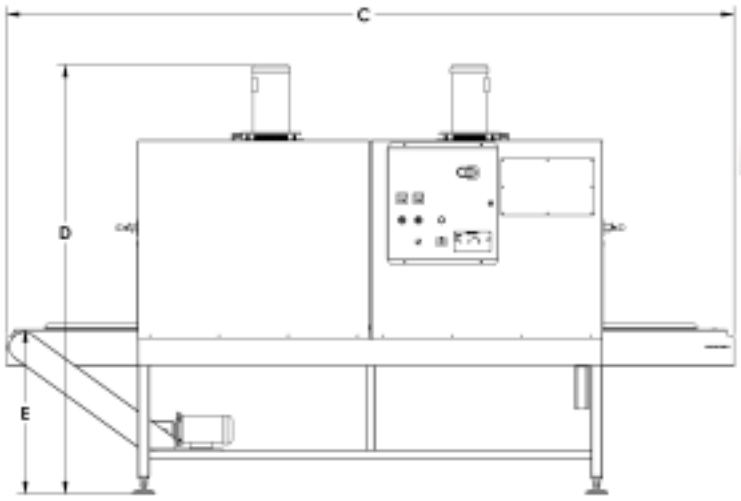

*Specifications on all machines subject to change without notice. Some information may have been updated since the time of publication.

TEXWRAP

PO BOX 185, 525 VOSSBRINK DR, WASHINGTON MO 63090
PH (636) 239-1188 · FAX (636) 239-7322
WWW.TEXWRAP.COM · SALES@TEXWRAP.COM